

# Voice Dialer

## Model: E-920A

Automatically dials up to four telephone numbers and delivers up to two different messages when triggered by an alarm system.

### FEATURES

- Easily connects to an alarm panel and automatically dials out when activated.
- Two independent voice messages. Stores up to four telephone numbers, cellular numbers or pager numbers.
- Delivers a message of up to 16 seconds to each number stored.
- Instant trigger or exit and entry delay settings.
- Repeats message two times to ensure full message is delivered.
- Waits 8 to 10 rings; calls back unanswered numbers up to 8 times.
- EEPROM retains memory if power is lost for up to one year.
- Optional 9-Volt internal battery provides stand-by power for approximately two to three days.
- Can be used worldwide due to Universal Dial Tone.
- Can be used with PBX and regular telephone systems.




### SPECIFICATIONS:

	<b>E-920A</b>
Power	12VDC
Current Draw	20mA (standby) 60mA (operate)
Trigger Inputs	2 N.C. Inputs
Temperature Range	-20°C to +50°C -4°F to +122°F
Number of Tel. #	Up to 4
Max. Digits per Tel. #	32
Case Material	ABS plastic
Weight (oz.)	11.9
Dimensions (in.)	5 <sup>3</sup> / <sub>4</sub> x 4 x 1 <sup>1</sup> / <sub>2</sub>

### CONTROLS:

- A. Siren jack (piezo siren output)
- B. Sensor input modular connector
- C. Telephone line modular connector
- D. DC adapter jack
- E. 9VDC battery compartment
- F. Speaker
- G. Microphone
- H. Dial keys
- I. Power switch
- J. LCD display
- K. MODE button
- L. MEMORY button
- M. VOICE memory button
- N. DIP Switches for programming

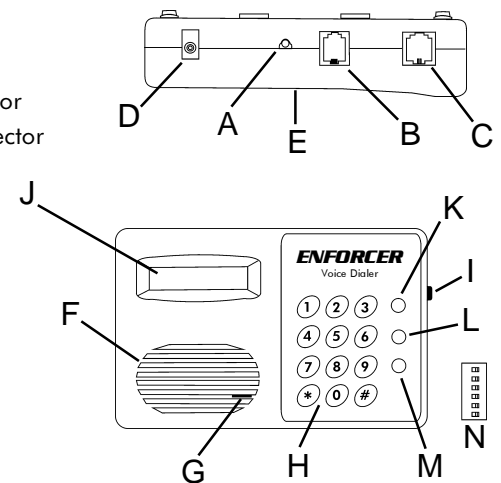

La póliza de SECO-LARM esta en continuo mejoramiento. Por esa razón, SECO-LARM se reserva el derecho de cambiar precios y especificaciones sin previo aviso. SECO-LARM no se hace responsable de errores de imprenta.